

# 6225



MODEL 6225

## SOFT SERVE FREEZER

Twin twist flavor Countertop, Gravity feed  
Microprocessor control

### Product Offering

All popular soft serve variations from low or non-fat ice cream to custards, yogurt and sorbet.

### Freezing Cylinder

Two, 1.8 quarts (1.7 Liter)

### Mix Hopper

Two, 12.68 quarts (12 Liters)

Hopper refrigeration maintains mix temperature Below 40°F (4.4°C) during Cool and Standby modes.

### Mix Low Indicator

When mix level is low, the Mix Low light turns "ON" to alert operator to add mix.

### Standby

Maintains product temperature in the mix hoppers and freezing cylinders below 40°F (4.4°C) during long no-use periods.

### Microprocessor Controls

Automatically regulates refrigeration by monitoring product viscosity to maintain consistent quality.

### Counter

Records number of dispenses per day and total number of dispenses.

### Temperature Display

Displays hopper and cylinder temperature; helps Control product softy

### Output

37 Quarts/Hour

### Safety Protections


- Low temperature and motor overload cutouts protect from cylinder over freezing
- High pressure switch prevents compressor overheat
- Thermal overload protects from motor overheat





Intertek  
4001176



Intertek

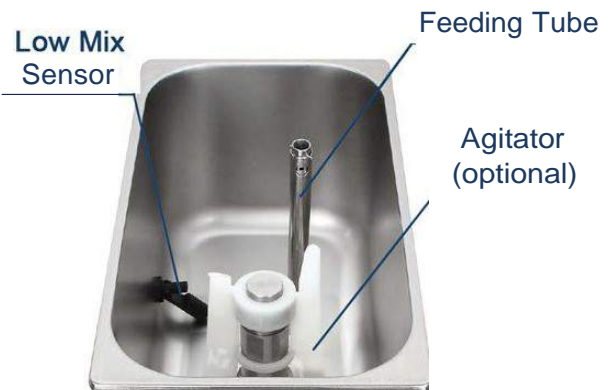

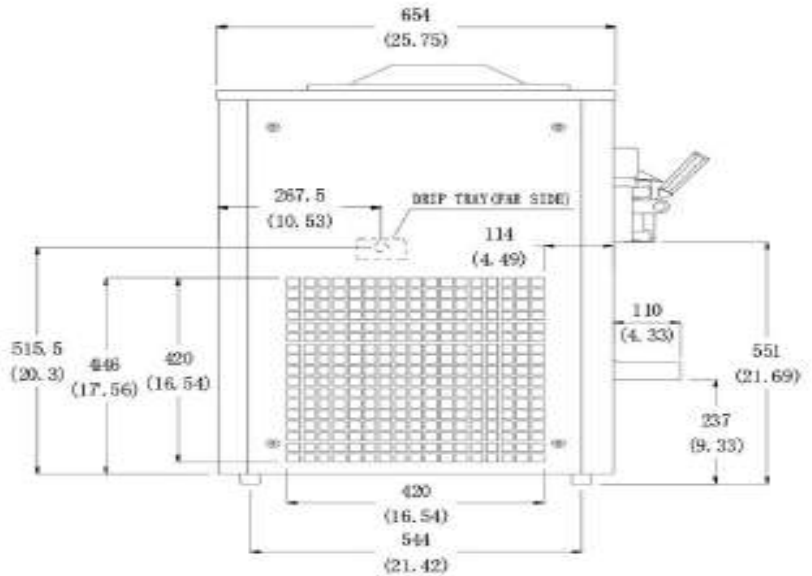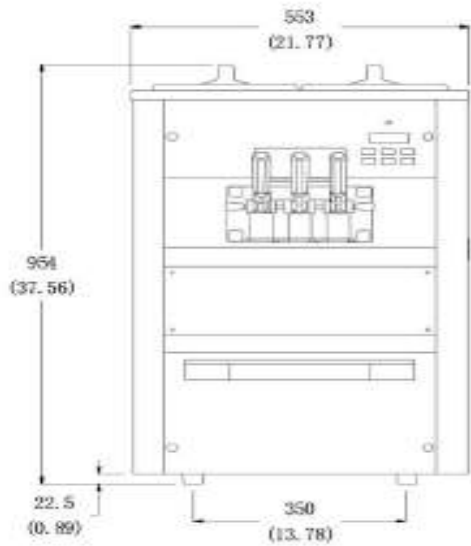

| Weight   | Ib/Kg     |
|----------|-----------|
| Net      | 342 / 155 |
| Shipping | 375 / 170 |

**Packaging Volume** 19.97 CBF / 0.57 CBM

| Dimensions | Net (in/mm) | Shipping (in/mm) |
|------------|-------------|------------------|
| Width      | 21.8 / 553  | 24.4 / 620       |
| Depth      | 25.7 / 653  | 31.5 / 800       |
| Height     | 27.7 / 957  | 44.9 / 1140      |

| Electrical    | Maximum Fuse Size | Min. Circuit Ampacity | Poles (P) Wires (W) |
|---------------|-------------------|-----------------------|---------------------|
| 208 -230/60/1 | 20                | 15                    | 2P/3W               |

| LRA | Plug   |
|-----|--------|
| 37A | L6-20P |

*This unit may be manufactured in other electrical characteristics. Refer to the local Distributor for availability.  
(For exact electrical information, always refer to the data label of the unit.)*

**Note**  
Continuing research results in steady improvements; therefore these specifications are subject to change without notice.

## Specifications

### Electrical

One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord receptacle specifications as per local codes.

### Motor

One, 1.5HP

### Refrigeration System

Compressor: One, 4,400 BTU/HR, R404A  
(BTUs may vary depending on compressor used.)

### Separate Hopper Cooling Compressor

One, 480 BTU/HR, R134A  
(BTU's may vary depending on compressor used.)

### Air Cooled

Minimum clearance of 6" (152mm) on both sides of the machine is required to achieve optimum performance.

The rear of the unit may be placed against a wall.

Max room temperature 95° F

### Options:

- Air Exhaust Kit
- Local language Control Systems: English, French, Spanish, German, Dutch, Czech, Chinese