

## SOFT SERVE FREEZER

Twin twist flavor, floor standing, gravity feed, microprocessor control, independent cylinder refrigeration and control system.

### Product Offering

All popular soft serve variations from low or non-fat ice cream to custards, yogurt and sorbet.

### Freezing Cylinder

Two, 1.7 Liter (1.8 quarts)

### Mix Hopper

Two, 12 Liters (12.68 quarts)

Separate hopper refrigeration maintains mix temperature below 4.4°C (40°F) during Cool and Standby modes.

### Mix Low Indicator

When mix level is low, the Mix Low light turns "ON" to alert operator to add mix.

### Standby

Maintains product temperature in the mix hoppers and freezing cylinders below 4.4°C (40°F) during long no-use periods.

### Microprocessor Controls

Automatically regulates refrigeration and maintains consistent product quality by controlling product temperature and viscosity.

Independent control system per cylinder.

### Counter

Records number of dispenses per day and total number of dispenses.

### Temperature Display

Displays hopper and cylinder temperature, helps control product safety.

### Output

50 Quarts//Hour

### Safety Protections

- Low temperature and motor overload cutouts protect from cylinder over freezing.
- High pressure switch prevents compressor overheat.
- Thermal overload protects from motor overheat.





**ISO9001**  
CERTIFIED



**Flexible Blade Beater**  
Higher Capacity, Higher Overrun



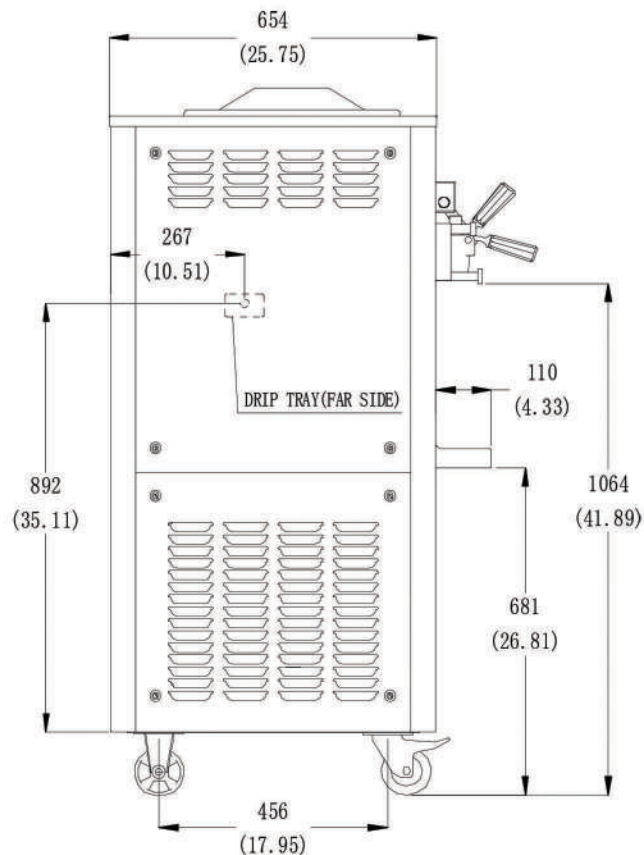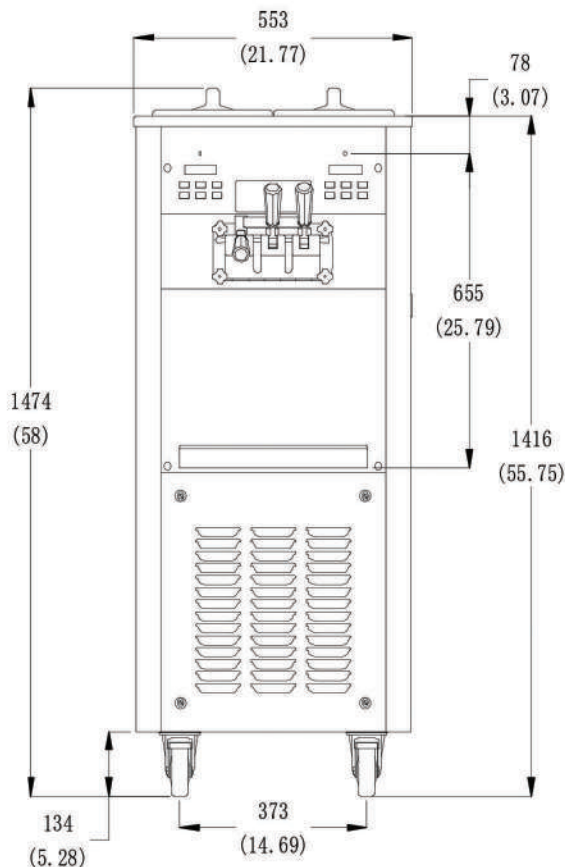

Weight	Kg / lb
Net	166 / 369
Shipping	183 / 407

Packaging Volume	0.82 CBM / 29 CBF
------------------	-------------------

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	553 / 21.8	650 / 25.6
Depth	654 / 25.7	780 / 30.7
Height	1474 / 58.0	1620 / 63.8

Electrical	Maximum Fuse Size	Min. Circuit Ampacity	Poles (P) Wires(W)
208-230/60/1	20	15	2P/3W

Plug	Model Number
LRA:46	L6-20P

*This unit may be manufactured in other electrical characteristics. Refer to the local Distributor for availability.  
(For exact electrical information, always refer to the data label of the unit.)*

#### Note

Continuing research results in steady improvements, therefore these specifications are subject to change without notice.

## Specifications

### Electrical

One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord & receptacle specifications as per local codes.

### Motor

Two, 1.25HP

### Refrigeration System

Main Compressor: One, 6500 BTU/HR, R404A

### Separate Hopper Cooling Compressor

One, 480 BTU/HR, R134A  
(BTUs may vary depending on compressor used.)

### Air Cooled

Minimum clearance of 152mm (6") on unit left, right and back sides is required to achieve optimum performance. Max room temperature 95°F.

### Options

- Air Exhaust Kit (Air Cooled only).
- Water Cooled, Air Pump, Hopper Agitator
- Local language Control systems: English, French, Spanish, German, Dutch, Czech, Chinese.