

6265



MODEL 6265

SOFT SERVE FREEZER

Three flavor, two twist, Countertop, Gravity feed, Microprocessor control, Independent refrigeration and control system for each flavor

Product Offering

Offer all popular soft serve variations from low or non-fat ice cream to custards, yogurt and sorbet

Freezing Cylinder

Three, 1.7 Liter (1.8 quarts)

Mix Hopper

Three, 8 Liters (8.5 quarts)

Separate hopper refrigeration maintains mix temperature below 4.4°C (40°F) during Cool and Standby modes.

Mix Low Indicator

When mix level is low, the Mix Low light turns "ON" to alert operator to add mix.

Standby

Maintains product temperature in the mix hoppers and freezing cylinders below 4.4°C (40°F) during long no-use periods.

Microprocessor Controls

Automatically regulates refrigeration and maintains consistent product quality by controlling product temperature and viscosity.

Counter

Records number of dispenses per day and total number of dispenses.

Temperature Display

Displays hopper and cylinder temperature; helps control product safety.

Output

65 Quarts/Hour

Safety Protections

- Low temperature and motor overload cutouts protect from cylinder over freezing
- High pressure switch prevents compressor overheat
- Thermal overload protects from motor overheat





ISO9001 CERTIFIED



Flexible blade beater
Higher capacity, higher overrun



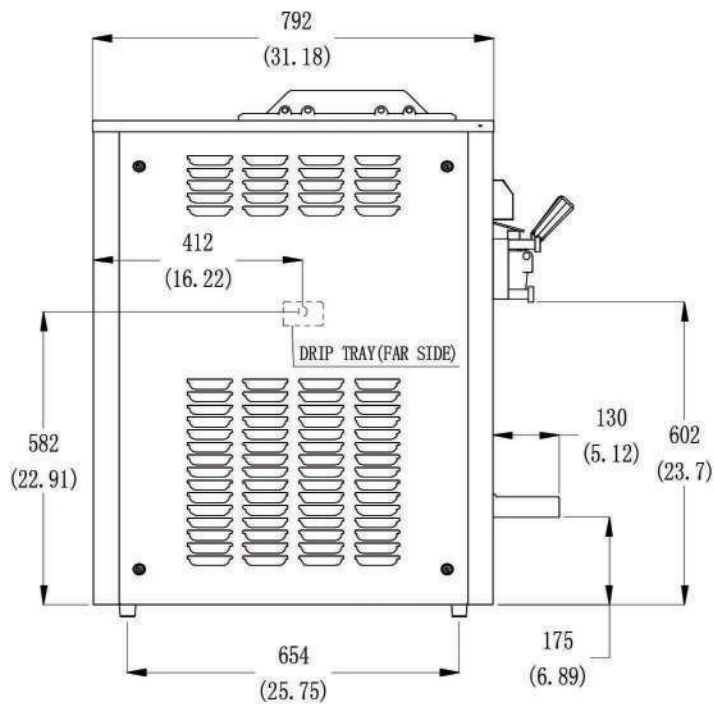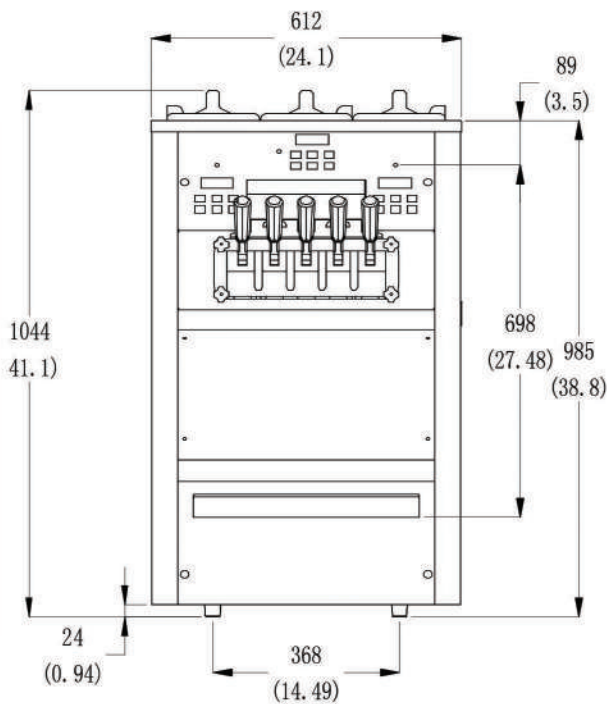

Weight	Kg / lb
Net	210 / 463
Shipping	227 / 500

Packaging Volume	0.82 CBM / 29 CBF
------------------	-------------------

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	612 / 24.1	685 / 27.0
Depth	792 / 31.2	955 / 37.6
Height	1044 / 41.1	1255 / 49.4

Electrical	Maximum Fuse Size	Min. Circuit Ampacity	Poles (P) Wires(W)
208-230/60/1	30	26	2P/3W

PLUG: L6-30

This unit may be manufactured in other electrical characteristics. Refer to the local Distributor for availability.

(For exact electrical information, always refer to the data label of the unit.)

Note

Continuing research results in steady improvements, therefore these specifications are subject to change without notice.

Specifications

Electrical

One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord & receptacle specifications as per local codes.

Motor

Three, 1.25HP

Refrigeration System

Main Compressor: One, 6500 BTU/HR, R404A

Separate Hopper Cooling Compressor

One, 480 BTU/HR, R134A
(BTUs may vary depending on compressor used.)

Air Cooled

Minimum clearance of 152mm (6") on unit left, right and back sides is required to achieve optimum performance. Max room temperature 95° F

Options

- Air Exhaust Kit
- Water Cooled, Air Pump, Hopper Agitator, Flexible Blade Beater
- Local language Control systems: English, French, Spanish, German, Dutch, Czech, Chinese.