

# 6368



MODEL 6368

## SOFT SERVE FREEZER

Twin twist flavor, Floor, Gravity feed, Microprocessor control, Independent refrigeration and control system for each flavor

### Product Offering

Offer all popular soft serve variations from low or non-fat ice cream to custards, yogurt and sorbet

### Freezing Cylinder

Two, 1.7 Liter (1.8 quarts)

### Mix Hopper

Two, 15 Liters (15.9 quarts)

Separate hopper refrigeration maintains mix temperature below 4.4°C (40°F) during Cool and Standby modes.

### Mix Low Indicator

When mix level is low, the Mix Low light turns "ON" to alert operator to add mix.

### Standby

Maintains product temperature in the mix hoppers and freezing cylinders below 4.4°C (40°F) during long no-use periods.

### Microprocessor Controls

Automatically regulates refrigeration and maintains consistent product quality by controlling product temperature and viscosity.

### Counter

Records number of dispenses per day and total number of dispenses.

### Temperature Display

Displays hopper and cylinder temperature; helps control product safety

### Output

60 Quarts/Hour



### Safety Protections

- Low temperature and motor overload cutouts protect from cylinder over freezing
- High pressure switch prevents compressor overheat
- Thermal overload protects from motor overheat



Flexible blade beater  
Higher capacity, higher overrun



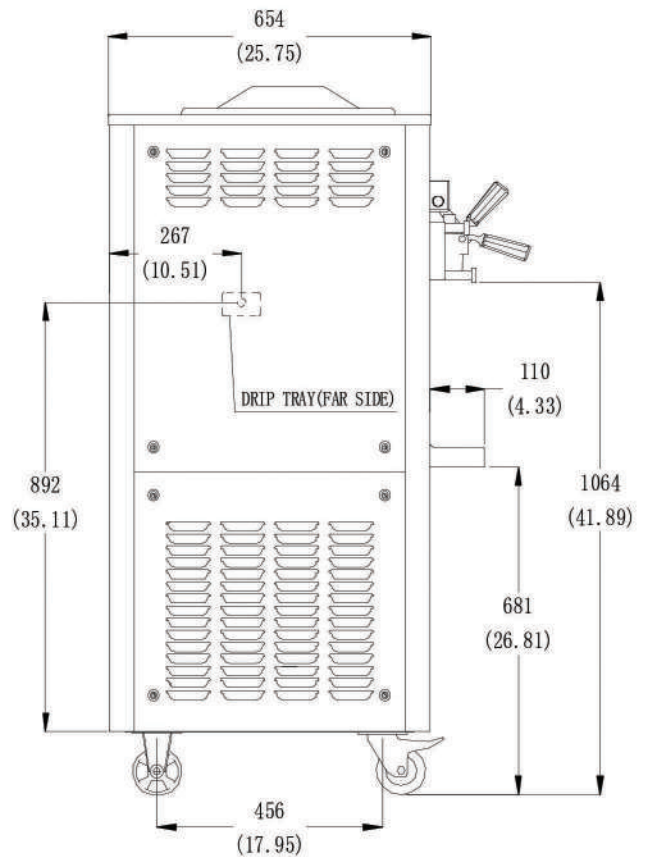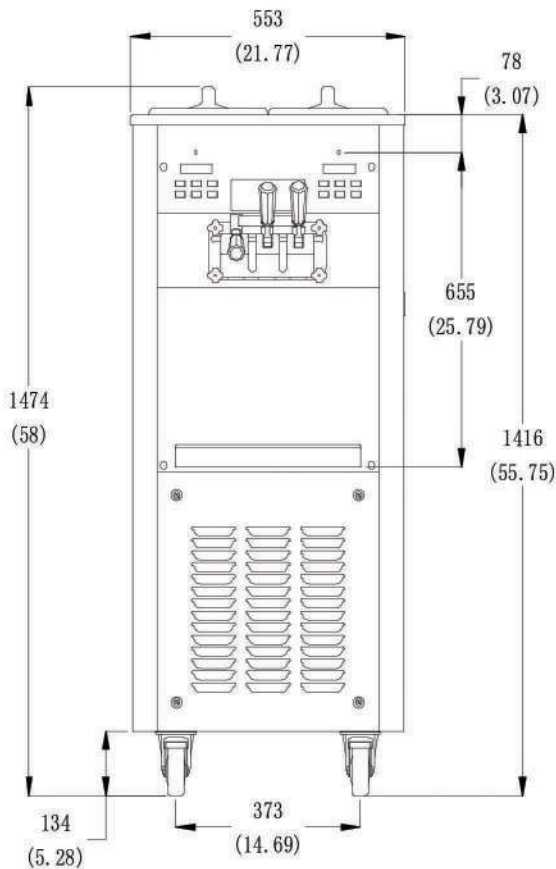

Weight	Kg / lb
Net	204 / 450
Shipping	219 / 483

**Packaging Volume** 0.82 CBM / 29 CBF

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	553 / 21.8	650 / 25.6
Depth	654 / 25.7	780 / 30.7
Height	1474 / 58.0	1620 / 63.8

Electrical	Maximum Fuse Size	Min. Circuit Ampacity	Poles (P) Wires(W)
208-230/60/1	30	18	2P/3W

PLUG: L6-30

*This unit may be manufactured in other electrical characteristics. Refer to the local Distributor for availability.*

*(For exact electrical information, always refer to the data label of the unit.)*

**Note**

Continuing research results in steady improvements, therefore these specifications are subject to change without notice.

**Specifications**

**Electrical**

One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord & receptacle specifications as per local codes.

**Motor**

Two, 1.25HP

**Refrigeration System**

Main Compressor: Two, 4,400 BTU/HR, R404A

**Separate Hopper Cooling Compressor**

One, 480 BTU/HR, R134A  
(BTUs may vary depending on compressor used.)

**Air Cooled**

Minimum clearance of 152mm (6") on unit left, right and back sides is required to achieve optimum performance. Max room temperature 95° F

**Options**

- Air Exhaust Kit
- Water Cooled, Air Pump, Hopper Agitator, Flexible Blade Beater
- Local language Control systems: English, French, Spanish, German, Dutch, Czech, Chinese.