/// Soft Serve Machine



220V - Gravity Feed

- ☆ Two Flavor // Countertop
- ☆ Digital Control
- ☆ Up to 360, 4oz servings per hour
- Ideal for medium capacity outlets to serve ice cream, frozen yogurt, gelato or sorbet. Fully loaded with all standard options.



$|\downarrow|\downarrow|$ Gravity Feed

The Spaceman gravity-fed machines produce consistent product quality with a solution that is easy to operate and easier to clean with less moving parts.

Patented 100% Controlled Contact Flooded Evaporator

Designed for maximum efficiency, this innovation delivers the industry's fastest freeze-down and recovery times. The result? Smaller ice crystals and the smoothest, creamiest mouthfeel.

V5 Single-Piece Auger Design

A fully integrated auger eliminates parts, reduces cleaning time and failure points in the drivetrain, ensures 100% evaporator wall contact, and enhances product consistency with the smallest ice crystals and smoothest mouthfeel in the industry.

Smart Safety Controls & Standby Mode

Independently set and control standby temperatures for the hopper and freezing cylinder, optimizing energy efficiency and product quality during non-use. Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight.

Hopper Agitator

Maintain product consistency and prevent product separation.

The Spaceman Difference

QUALITY

Superior Craftsmanship

Designed by Aerospace Engineers

- ✓ Patented Freezing Cylinder
- \checkmark Built to last, attention to detail
- ✓ Microcrystal Technology

VALUE

Maximum ROI

Lower Your Cost of Ownership

- Fair up front cost
- Lower service and parts costs
- ✓ Lowest energy cost per serving

SERVICE

Best User Experience

Service on Your Terms

- ✓ Dedicated Success Team
- 🚫 No binding contracts
- S No locked−in maintenance fees



Defrost for Cleaning

Increases efficiency during cleaning by heating frozen product in cylinder.

Inverter Motor Control for Enhanced Durability

Allows the use of three-phase motors with single-phase power input, reducing torque and strain by controlling start-up speed. This innovation significantly minimizes gearbox and drivetrain failures caused by operational errors or freeze-ups.

Separate Hopper Cooling Controls

Independently control and cool each hopper to maintain ideal temperatures, prevent freezing around the sides, and optimize output by pre-chilling the product before it enters the freezing cylinder.


Dual-System Gravity-Fed Air Inlet

Combined with the V5 auger, this system optimizes overrun and product consistency, delivering the best long-term texture and quality in the industry.

/// Soft Serve Machine



6235-C

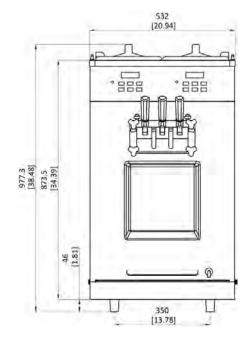

Specifications


Flavors	2 + 1
Freezing Cylinders	2 x 1.7L / 1.8 Qt
Mix Hoppers	2 x 12L / 12.7 Qt
Output Capacity (8oz servings)	360 serves/hr
Max Serving Size	4oz
Clearance Requirements	152mm/6" on left

Weight	Kg/lb (Gravity)	
Net	173 / 381	
Shipping	191/421	
Volume	1 CBM / 21 CBF	

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	532 / 21	610 / 24
Depth	766 / 30	860 / 34
Height	977 / 39	1150 / 45

Electrical	Power (kW)	Total Amps (A)	Plug
208-230/60/1	3.6	16	L6-20P

*Above specifications are subject to change without notice

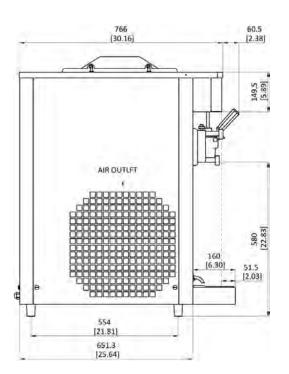

Features

Control System	Two, Digital
Refrigerated Hopper	~
Hopper Agitator	~
Temperature Display	~
Standby Mode	~
Auto Closing Dispensing Valve	~
Dispensing Speed Control	~
ow Mix Indicator Light & Alarm	~
ow Temperature Protection	~
Notor Overload Protection	~
High Pressure Protection	~
Defrost & Quick Freeze	~
Soft Start	~

Available Options

Water Cooled	~
Top Air Discharge Chute	~
Cart (Trolley)	~

